


Anemostat tavan casetat racord patrat

AN-P

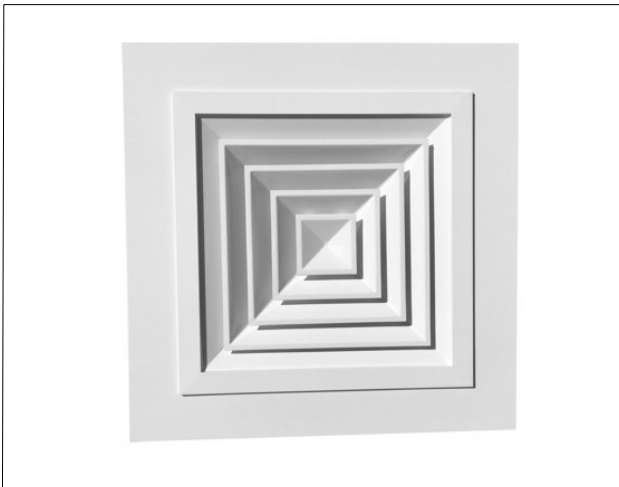

Detalii constructive. Utilizare.

Anemostat pentru tavan casetat cu racord patrat.
Difuzie in 4 directii.

Se utilizeaza cu precadere pentru refulare / introducere aer,
dar si pentru aspiratie / evacuare sau recirculare,
in diverse sisteme de ventilatie si aer conditionat.

Material.

Aluminiu / otel (profile extrudate si ambutisate).

Finisaj.

Finisaj standard: alb RAL9016.
Finisaje optionale: diverse nuante RAL (cost suplimentar).

Montaj. Fixare.

Montaj pe plafon.
Direct in structura tavanului fals casetat.

Accesorii optionale.

Registru reglaj debit / damper – **OBD** (cost suplimentar).
Plenum racord (adaptor tubulatura) – **PL** (cost suplimentar).

Cod comanda: **AN-P** aaa / bbb

Cod produs


cote exterior (mm)

cote interior / racord (mm)

nespecificat - alb RAL9016 (standard)

RALxxxx - cod RAL optional

Date tehnice

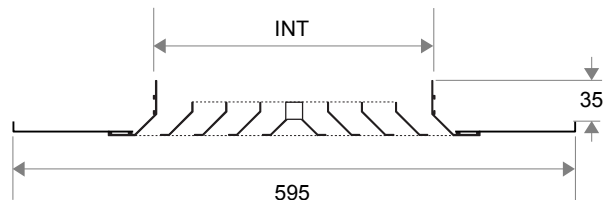

Dimensiuni

Dimensiuni	Q (m ³ /h) @ Vef 3,5 (m/s)
595 / 225	280
595 / 300	550
595 / 375	860

Nu sunt disponibile alte dimensiuni.

Anemostat tavan casetat racord patrat

AN-P

Date tehnice

Q (m ³ /h)	Dim. (mm)	595 / 225	595 / 300	595 / 375
		A _{ef} (m ²)	0,025	0,024
120	L _t (m)			
	L _w (dB(A))			
	ΔP _t (Pa)			
160	L _t (m)	0,7		
	L _w (dB(A))	13		
	ΔP _t (Pa)	2		
200	L _t (m)	0,8		
	L _w (dB(A))	18		
	ΔP _t (Pa)	4		
250	L _t (m)	1,0		
	L _w (dB(A))	24		
	ΔP _t (Pa)	6		
300	L _t (m)	1,3	0,9	
	L _w (dB(A))	28	16	
	ΔP _t (Pa)	8	3	
400	L _t (m)	1,7	1,3	
	L _w (dB(A))	35	24	
	ΔP _t (Pa)	15	5	
500	L _t (m)	2,1	1,6	1,3
	L _w (dB(A))	41	29	20
	ΔP _t (Pa)	23	7	3
600	L _t (m)		1,9	1,5
	L _w (dB(A))		34	25
	ΔP _t (Pa)		10	4
800	L _t (m)		2,5	2
	L _w (dB(A))		41	32
	ΔP _t (Pa)		18	8
1000	L _t (m)		3,1	2,5
	L _w (dB(A))		46	37
	ΔP _t (Pa)		29	12
1200	L _t (m)			3
	L _w (dB(A))			42
	ΔP _t (Pa)			17
1600	L _t (m)			4
	L _w (dB(A))			49
	ΔP _t (Pa)			30
2000	L _t (m)			
	L _w (dB(A))			
	ΔP _t (Pa)			


Datele sunt valabile pentru:

- H plafon = 3,0 ± 0,5m
- L_t (m) @ V_t = 0,25 m/s (cu efect Coanda)
- L_w(dB(A)) inclusiv atenuare incapere 5dB(A)
- Diferenta temperatura Dt = -10K

Anemostat tavan casetat racord patrat


AN-P

Fixare




Montaj in structura tavanului fals casetat (**standard**).

Accesorii optionale



OBD - Registru reglaj debit / damper cu jaluzele opuse.
(Accesoriu optional cu cost suplimentar)

*cota suplimentara fata de cota anemostatului

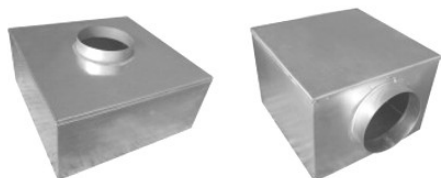

PL – Plenum racord / adaptor la tubulatura flexibila.
(Accesoriu optional cu cost suplimentar)

Variante executie:

- neizolat sau izolat (termic, anticondens)
- racord la tubulatura in partea superioara sau lateral