



DESCRIPTION

High-performance floor convector, generally used in flats, offices, office buildings, halls etc., mainly in facilities allowing no installation of wiring for fan-fitted convectors.



SPECIFICATION

- Flats, houses offices, corridors, halls ...
- High heating output of natural convection
- Suitable for combining with other heating systems
- Dry ambience

DIMENSIONS (WITHOUT LEDGE)


- Width: W = 311 mm
- Height: H = 115 mm
- Length: L = 1200, 1600, 2000, 2400, 2800 mm
- Inclusively ledge: W +35mm, L+35mm, H+1,5 mm
- Combination with FST40-11, identical width

BASIC INFORMATION

- Paint coated galvanized steel trough
- Lamellar Cu-Al exchanger, connection G1/2", air release valve
- Anodized Al-natur roll grill
- Peripheral ledge 20 × 20 mm
- Direct and corner lockshield valve packed in

INSTALLATION

Recommended distance from window is 100-150 mm.

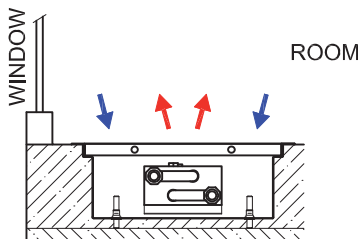

IMPORTANT INFORMATION

- Regulation elements, thermostats, see page 10
- Hydraulic parameters, see page 11
- Lockshield parameters, see page 11



HEATING OUTPUT

Temperature gradient	Length [mm] / Output Qn [W]				
	1200	1600	2000	2400	2800
90/70/20°C	370	539	707	875	1044
75/65/20°C	284	414	543	672	802
70/55/20°C	224	327	429	531	634
55/45/20°C	136	198	259	321	383

